


ACCESSORIES


DOORS

CLOSE WINDOW


Sliding Doors




Inner & outer curved angle seals against weather, rodents & birds

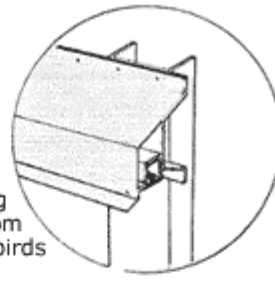


Extended rain shedder seals sliding door assembly from weather & birds

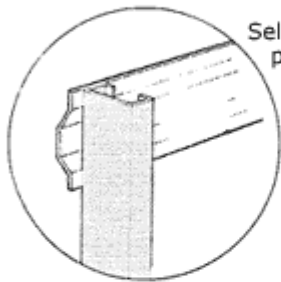


Self-supporting structure prevents sagging of doors

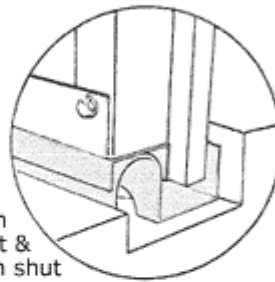


Door guide prevents wind damage when open and is rodent & weather-proof when shut

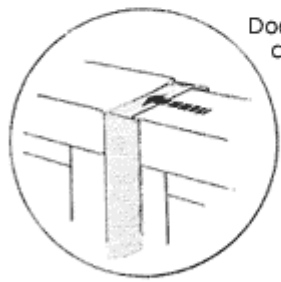


Doors sealed when closed against weather, rodents and birds

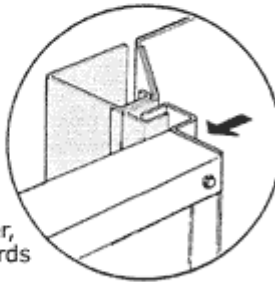

Sealed at sides when closed against weather, rodents & birds

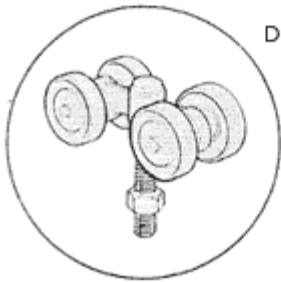


Doors slide easily

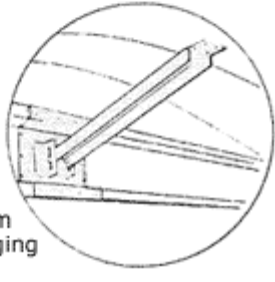

Additional support for header beam prevents sagging

Overhead Doors

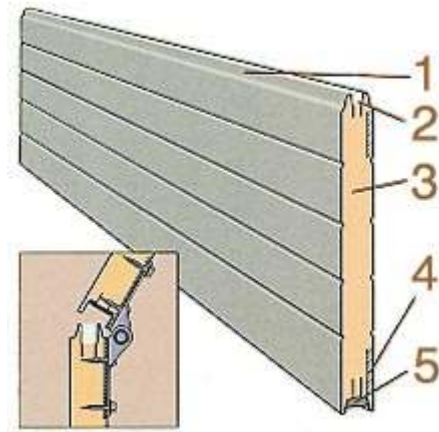

1. Metal is G-90 galvanized and features a one mil thick PPG paint finish to prevent rust and corrosion
2. Built-in thermal break inhibits thermal transmission across the panel
3. Urethane foam is Class I fire rated. Over 95% of the polyurethane cells are closed, making the foam impermeable to water, while also maintaining a high R-value over a long time period
4. Built-in hinge plates are 3-3/4" wide and are continuous top to bottom. This permits usage of standard hinges, provides structural strength and allows the panel to be cut to custom lengths
5. Gasketed tongue-and-groove joint design prevents air and water infiltration through the joint